



FrothPro™ 507 Reduces Total Cost of Operation and Improves Performance at a Copper Concentrator in South America



CASE STUDY - MINING
CH-2000



Nalco Water understands that Mineral Processing Operations must constantly find ways to increase recovery, optimize reagent consumption and reduce total cost of operation and footprint. In copper sulfide concentrations, we've helped customers address a number of site-specific flotation challenges using our FrothPro line of frothers.

SITUATION:

A South American copper mine enlisted Nalco Water to help meet their operational goals to:

- Improve copper recovery
- Reduce total cost of operations
- Increase productivity
- Enhance safety

We worked with the customer to develop a customized plan specific to their operations in order to achieve their goals.

CUSTOMER IMPACT



ECONOMIC RESULTS

Decrease exposure to operators of handling large volumes of chemicals.



SAFETY

\$225 K/year maintenance & services

Reduce footprint.



ASSETS

37% decrease of Chemical consumption

Yield increase

Copper recovery increased by 2,526 Tons/year, \$12.6MM/year*

Reduced total cost of operation



COSTS

\$2.15 million/year Direct Saving
\$14.98 million/year Total Impact

eROI is our exponential value: the combined outcomes of improved performance, operational efficiency and sustainable impact delivered through our services and programs.

*At \$5,000/ton

The ore mineralogy was predominantly chalcopyrite (CuFeS_2), and bornite (Cu_5FeS_4), with covellite (Cu) associated with gangue minerals, including pyrite and magnetite. The existing frother program – Methyl Isobutyl Carbinol (MIBC) and Polypropylene glycol – could not achieve adequate results in this complex matrix. Chemical usage was excessive and dosage was difficult to control by the operators. Marginal recovery improvements were possible, but required difficult manual adjustments. In addition, from an environmental and safety standpoint, MIBC is not ideal and the plant wanted to reduce handling of this type of material.

Further, the feed of large volumes of the flotation reagents presented additional material handling, safety, environmental and labor challenges.

PROGRAM:

Nalco Water worked with plant personnel to thoroughly understand the process mineralogy, a critical step in evaluating and recommending a frother. Laboratory screening indicated that FrothPro™ 507 would deliver the best technical and cost performance. Dosage optimization under real operational conditions refined the recommendations from the lab analysis.

RESULTS:

The new frother FrothPro™ 507 demonstrated superior performances compared to the standard reagent used in this copper concentrator. The FrothPro™ 507 helped to increase copper recovery by 2.4 p/p, increasing production at a lower treatment cost. (See Figure 1).

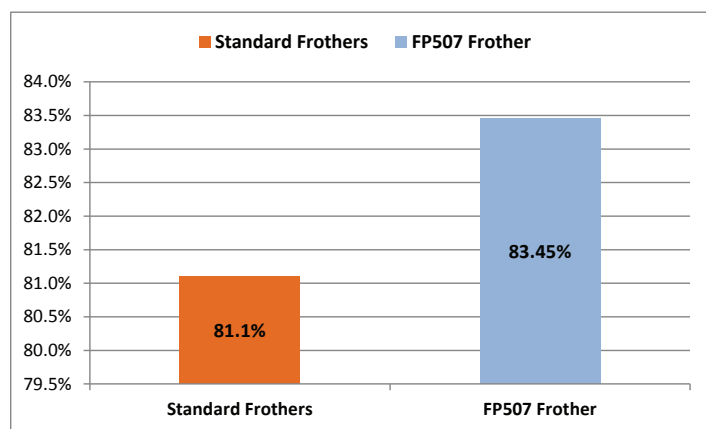


Figure 1. FrothPro™ 507 Increased Copper Recovery by 2.4% versus Standard Reagent in the plant

Nalco Water, an Ecolab Company

North America: 1601 West Diehl Road • Naperville, Illinois 60563 • USA

Europe: Richtstrasse 7 • 8304 Wallisellen • Switzerland

Asia Pacific: 2 International Business Park • #02-20 The Strategy Tower 2 • Singapore 609930

Greater China: 18G • Lane 168 • Da Du He Road • Shanghai China • 200062

Latin America: Av. Francisco Matarazzo • n° 1350 • Sao Paulo – SP Brazil • CEP: 05001-100

nalco.ecolab.com

FrothPro, Ecolab, Nalco Water and the logos are Trademarks of Ecolab USA Inc.
©2017 Ecolab USA Inc. All Rights Reserved 04/17 CH-2000

The flotation treatment cost was reduced by 37% with FrothPro™ 507 compared to the standard treatment. The customer estimates direct annual savings of US\$2.1 million by switching to the Nalco Water frother. Additionally, indirect cost savings in maintenance, safety and environmental footprint impacted the overall improvement in Total Cost of Operation.



CONCLUSIONS:

Frothers impact surface tension, loading capability and mass removal rate, all of which influence flotation performance. As a result, choosing the proper frother can have significant impacts on recovery, selectivity, and productivity as well as environmental footprint.

The use of FrothPro™ 507 improved copper recovery plus maintained copper concentrate grade even with the challenging ore type – and reduced overall reagent use. The switch reduced TCO, enhanced safety and reduced environmental footprint.

Nalco Water has both local field presence and global technical experts for critical onsite program development and troubleshooting. Working closely with our customers allows us to understand their process, challenges and build strong business partnership based on joint commitment to continuous improvement and sustainability.

NALCO Water
An Ecolab Company