



ES-2000HT Dishmachine


Leasing a dishmachine from Ecolab allows you to focus on your business with the security of knowing your warewashing operation is properly managed.

Superior Cleaning & Reliable Performance

- ▲ High temperature machine helps provide fast drying
- ▲ Self-cleaning internal sump helps ensure a clean final rinse
- ▲ Unique design helps ensure uncontaminated water is used in every cycle



Superior Results, 24-7 Service & A Great Financial Option.

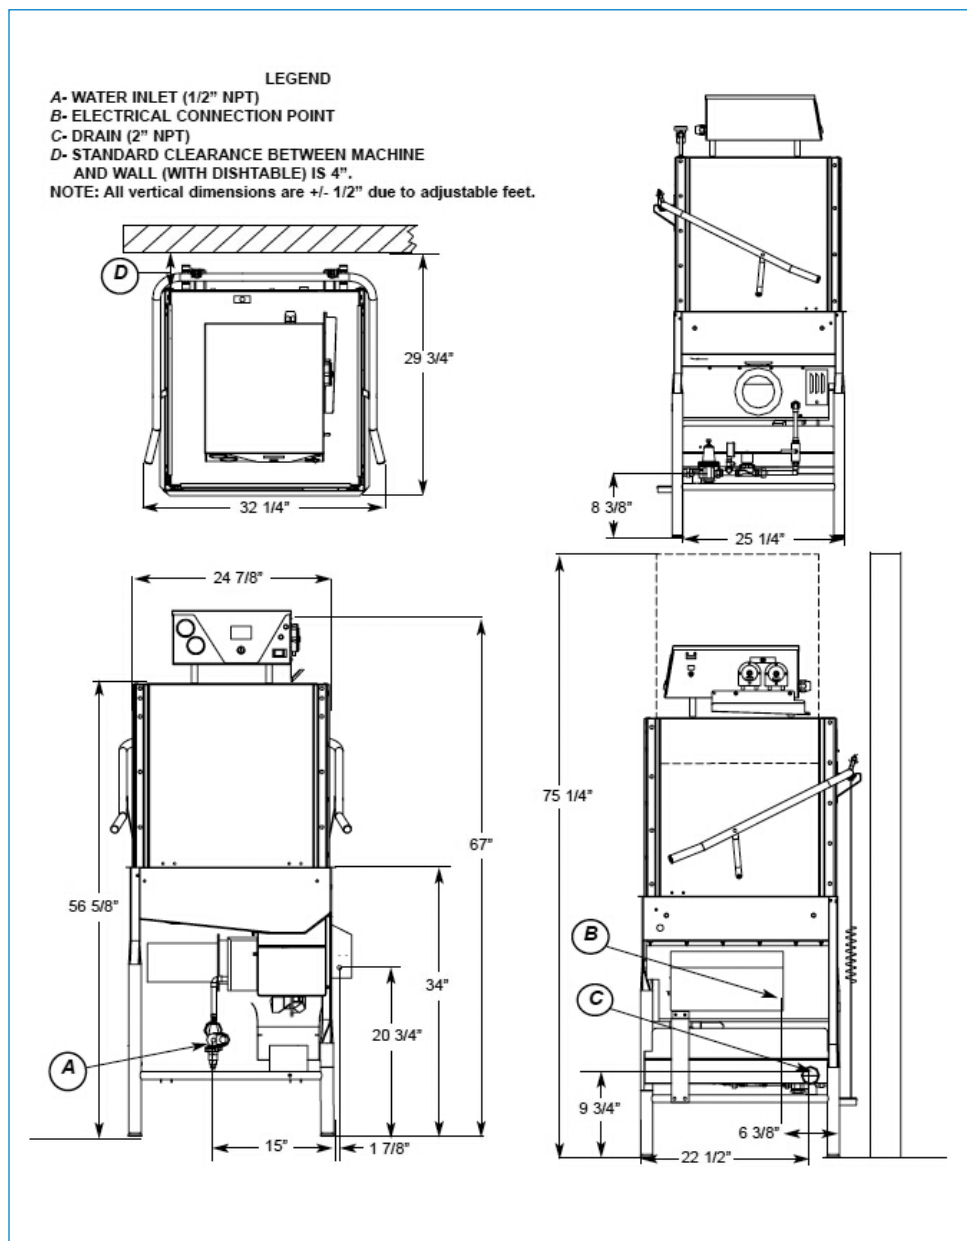

ES-2000HT SPECIFICATIONS:

OPERATING CAPACITY

Racks per Hour	55
----------------	----

OPERATING CYCLE (NORMAL)

Wash Time	41
Dwell Time	8
Rinse Time	11
Load Time	5
Total Cycle Time	65

OPERATING TEMPERATURES

Wash (minimum)	150° F
Sanitizing Rinse (minimum)	180° F

WATER CONSUMPTION

Gallons per Rack	1.25
------------------	------

ELECTRICAL RATINGS

Wash Pump	3/4 hp
-----------	--------

WASH CHAMBER

Height	17"
--------	-----

WEIGHT

Machine Weight	300 lbs
----------------	---------

UTILITY REQUIREMENTS ELECTRICAL

Voltage/Frequency/Phase:	208V/60Hz/1 Ph
Total Amperage	75.2 A
Minimum Electrical Circuit	100 A
Voltage/Frequency/Phase:	230V/60Hz/1 Ph
Total Amperage	68.8 A
Minimum Electrical Circuit	90 A
Voltage/Frequency/Phase:	208V/60Hz/3 Ph
Total Amperage	46.8 A
Minimum Electrical Circuit	60 A
Voltage/Frequency/Phase:	230V/60Hz/3 Ph
Total Amperage	43 A
Minimum Electrical Circuit	60 A

WATER

Waterline Size (minimum)	1/2"
Flow Pressure (required)	15-25 psi
Incoming Temperature (min)	110° F

DRAIN

Drainline Size (minimum)	2"
--------------------------	----

VENT HOOD

Flow-Cubic Feet per Minute	400
----------------------------	-----

