



SUPERIOR CLEANING &
RELIABLE PERFORMANCE


ES-4000 DISHMACHINE

- ▲ Low temperature, Energy Star® machine helps reduce operating costs
- ▲ Self-cleaning internal sump helps ensure a clean final rinse
- ▲ Unique design helps ensure uncontaminated water is used in every cycle

Leasing a dishmachine from Ecolab allows you to focus on your business with the security of knowing your warewashing operation is properly managed.



Superior Results, 24-7 Service & A Great Financial Option.

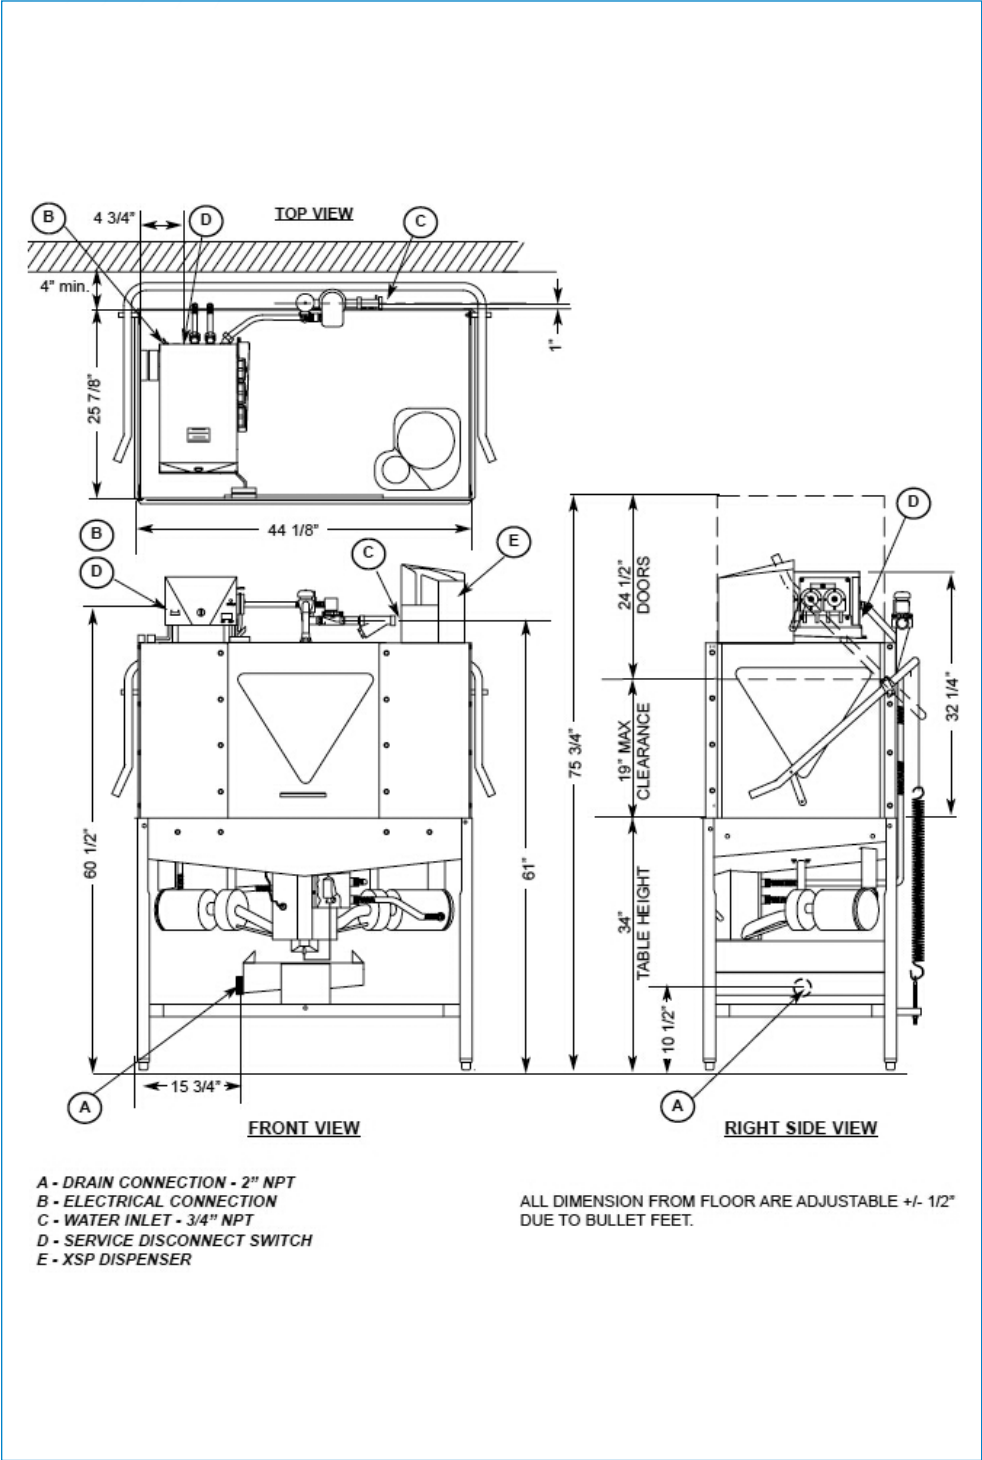

ES-4000 SPECIFICATIONS:

OPERATING CAPACITY	
Racks per Hour	78
OPERATING CYCLE (LIGHT)	
Total Cycle Time	77
OPERATING CYCLE (NORMAL)	
Wash Time	53
Dwell Time	20
Rinse Time	14
Load Time	5
Total Cycle Time	92
OPERATING TEMPERATURES	
Wash (minimum)	120° F
Sanitizing Rinse (min)	120° F
WATER CONSUMPTION	
Gallons per Rack	1.17
ELECTRICAL RATINGS	
Wash Pump	3/4 hp
WASH CHAMBER	
Height	17"
WEIGHT	
Machine Weight	310 lbs
UTILITY REQUIREMENTS ELECTRICAL	
Voltage/Frequency/Phase:	
115V/60Hz/1 Ph	
Total Amperage	23 A
Minimum Electrical Circuit	30 A
WATER	
Waterline Size (min)	3/4"
Flow Pressure (required)	15-25 psi
Incoming Temperature (min)	120° F
Incoming Temperature (recommended)	140° F
DRAIN	
Drainline Size (minimum)	2"

