



Omega 5E Dishmachine


Leasing a dishmachine from Ecolab allows you to focus on your business with the security of knowing your warewashing operation is properly managed.

Versatile & Energy Efficient

- ▲ Waist-high loading increases productivity
- ▲ Low temperature Energy Star® machine, helps reduce operating costs
- ▲ NSF Certified for quality cleaning of dishes and glasses



Superior Results, 24-7 Service & A Great Financial Option.

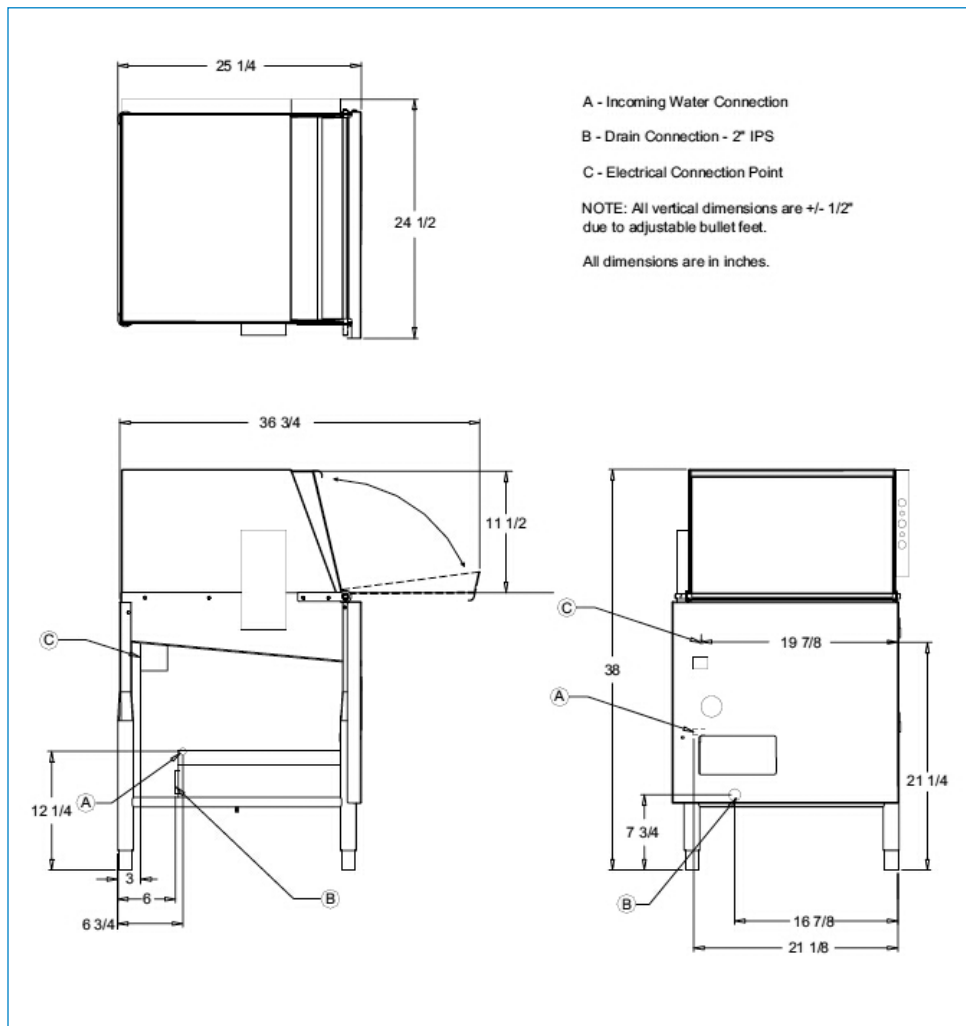

OMEGA 5E SPECIFICATIONS:

OPERATING CAPACITY

Racks per Hour 31

OPERATING CYCLE (NORMAL)

Wash Time	43
Dwell Time	18
Rinse Time	24
Load Time	30
Total Cycle Time	115

OPERATING TEMPERATURES

Wash (minimum)	120° F
Sanitizing Rinse (minimum)	120° F

WATER CONSUMPTION

Gallons per Rack 1.16

ELECTRICAL RATINGS

Wash Pump 3/4 hp

WEIGHT

Machine Weight 215 lbs

UTILITY REQUIREMENTS ELECTRICAL

Voltage/Frequency/Phase:
115V/60Hz/1 Ph

Total Amperage	16 A
Minimum Electrical Circuit	20 A

WATER

Waterline Size (minimum)	1/2"
Flow Pressure (required)	15-25 psi
Incoming Temperature (min)	120° F
Incoming Temperature (recommended)	140° F

DRAIN

Drainline Size (minimum) 2"

