



SUPERIOR CLEANING, RELIABLE PERFORMANCE


U-LT Low Temperature Undercounter Dishmachine

- ▲ Superior cleaning performance with pumped drain and upper & lower wash arms.
- ▲ Easy to operate with top-mounted, user friendly operator controls - on to fill, off to drain.
- ▲ Double-walled construction for quiet operation.
- ▲ Digital read outs and durable stainless steel buttons.

Leasing a dishmachine from Ecolab allows you to focus on your business with the security of knowing your warewashing operation is properly managed.



Superior Results, 24/7 Service and a Great Financial Option.

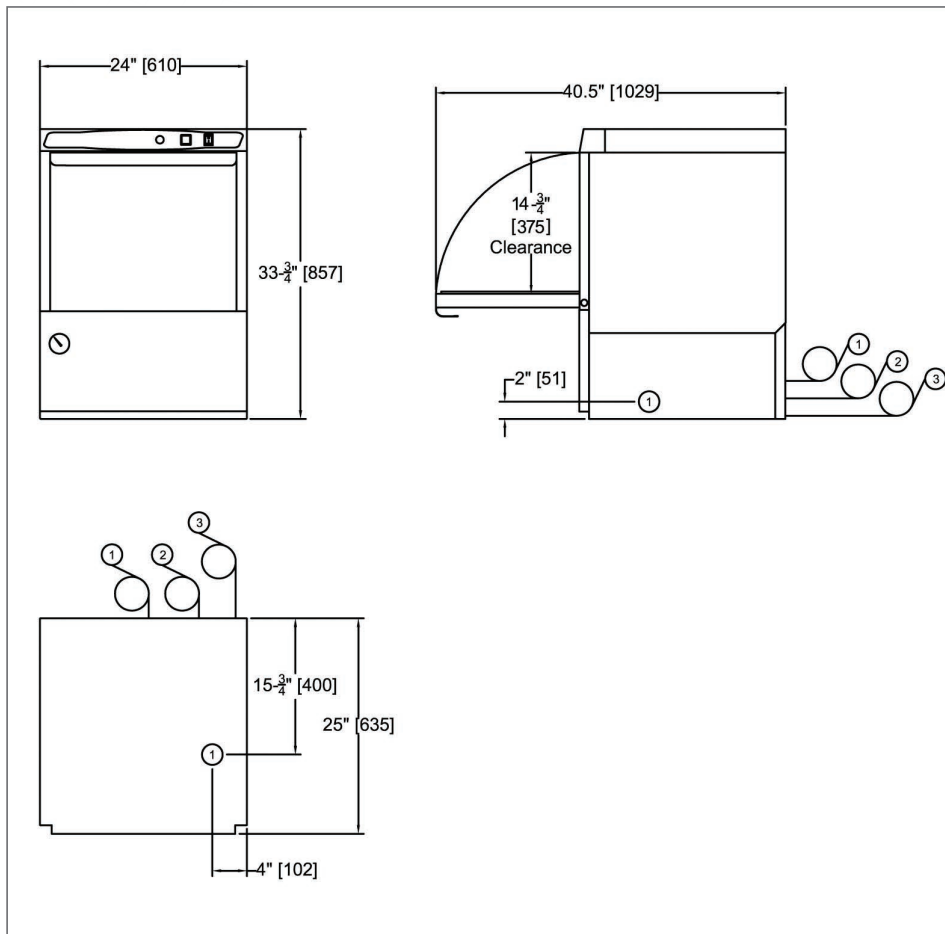

- ▲ Water hardness over 7 grains per gallon significantly impacts warewashing results. Ecolab's POU water softener helps you achieve superior results at a lower operating cost.
- ▲ Single point of accountability for improved results
- ▲ Worry-free lease includes installation and maintenance
- ▲ Compact cabinet design unit fits under most dish tables
- ▲ Uses up to 49% less salt than conventional hot water softeners

SPECIFICATIONS

OPERATING CAPACITY	
Racks per Hour	21
OPERATING CYCLE NORMAL	
Wash Time	90
Dwell Time	25
Rinse Time	26
Load Time	30
Total Cycle Time	171
OPERATING TEMPERATURES	
Wash (minimum)	120° F
Sanitizing Rinse (minimum)	120° F
WATER CONSUMPTION	
Gallons per Rack	1.6
ELECTRICAL RATINGS	
Wash Pump	1 hp
WEIGHT	
Machine Weight	178 lbs
UTILITY REQUIREMENTS ELECTRICAL	
Voltage/Frequency/Phase:	
115V/60Hz/1 Ph	
Total Amperage	12A
Minimum Electrical Circuit	15A
WATER	
Waterline Size (min)	1/2"
Flow Pressure (required)	25-35 psi
Minimum Incoming Temperature	120°F
Recommended Incoming Temperature	140°F
DRAIN	
Drainline Size (min)	1"